

Door Tablet WBX

Wayfinding Signage - For Common Areas



A compact device that runs on Microsoft Windows, for Door Tablet Wayfinding displays for public areas and touch kiosks.
Part of the Door Tablet WIN family



Easy to Install

Works “out of the box” with the Door Tablet system. Enables Wayfinding displays, welcome messaging and screensavers to be seen in your communal areas.



Remote Management

Manage the Door Tablet WBX remotely using the Door Tablet Web UI.



Interactive or Read-Only

Use with the Door Tablet touch and non-touch displays for read-only or interactive Wayfinding.



Full HD and Multi-Screen

HDMI output ensures a crystal-clear display (up to 3840 x 2160 at 30Hz) and clarity of text. Easily connects to multiple screens via two HDMI outputs.



Slim, Hardened Design

Fits easily behind all displays using the supplied velcro fittings. A robust device that will survive knocks and bangs.



Wired Ethernet or Wi-Fi

Clean installation via two cables, with IEEE 802.11 standard. Wi-Fi connectivity also available, if desired.




eMMC Storage

No reason to panic in the event of a sudden power loss as the WBX has 32GB eMMC storage ensuring data is not corrupted.



Low-Power System with Intel Processor

A fanless cooling system ensures silent running and ultra-low power consumption for ultimate power efficiency. With Intel inside you are assured a reliable system.

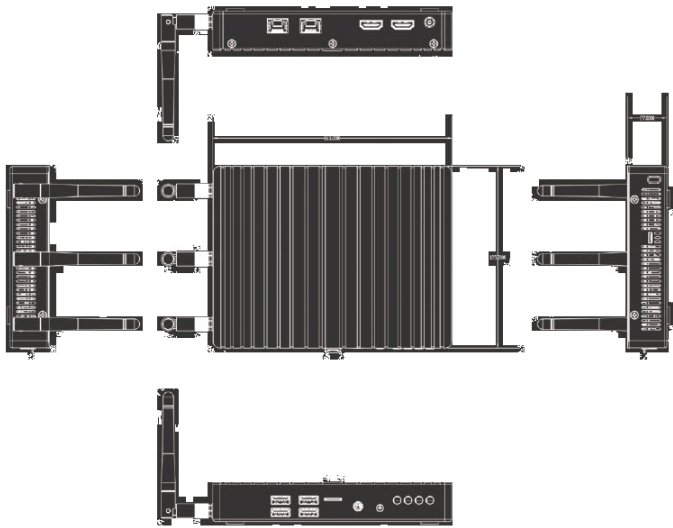

Features

| | |
|---------------------|--------------------------|
| CPU | Intel Celeron N3060 |
| Memory | 1.35V DDR3L 2GB DDR3L |
| Storage | 32GB eMMC |
| Orientation display | Landscape/Portrait |
| Audio codecs | MP3 |
| Networking+ | Wired and Wi-Fi |

Operating Environment

| | |
|------------------------|---|
| Type | Windows 10 Pro |
| HDMI Output Resolution | 3840 x 2160 at 30Hz 2560 x 1600 at 60Hz 2560 x 1440 via eDP |

I/O Interface

| | |
|-------------------|--|
| Ethernet | RJ45 (10M/100M) |
| USB | 4 x USB 3.0, 1 x Micro-B USB |
| Analog Stereo out | 1 |
| Expansion storage | 1 x Full-size Mini-PCIe slot 1 x Half-size Mini-PCIe slot |

Mechanical

| | |
|---------------|--|
| Dimensions | 140.8 x 107.5 x 27 mm |
| Weight | 570g |
| Mounting | Surface / Scotched |
| Housing | Metallic |
| Environment | Operating Temp: 0 to 40° C Operating Humidity: 0 to 90% |
| Power | DC 19V, 65W/3.42A |
| Certification | CE/FCC |

<http://door-tablet.com> | sales@door-tablet.com

UK +44 800 910 1131 | USA +1 407 545 5925

Server is available for download after registration

Tablet apps are available from Apple, Google and Microsoft Application stores.

Search: door tablet

Door Tablet is a trademark of Public. Class Limited. All other trademarks belong to their respective owners.

